


# DCNM-DVT

www.bo h t . o

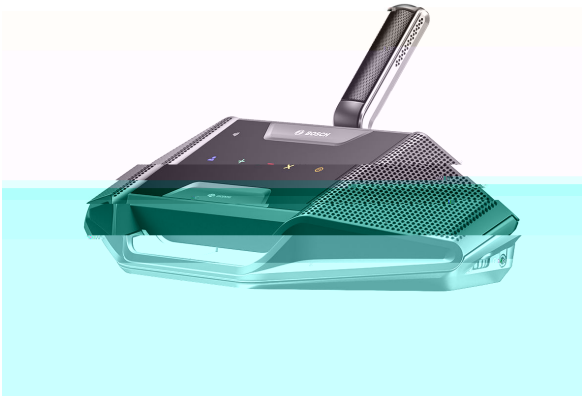

u  
u  
u

S

S

S

S

S

S

•

•

•

•

•

•

S

•

•

-

-

-

-

-

v

( )

•

•

-

•

•

•

•

•

-

•

-

-

-

-

-

•

•

•

•

3.

0.4

2

J4

## DCNM-DVT DICENTIS

/	
CE	DECL E C DCNM-DVT

## DCNM-DVT DICENTIS

1	DCNM DVT DICENTIS
---	-------------------

## DCNM-DVT

	48 VDC
	3.7 W

	100 Hz – 20 kHz	-3 dB
THD	< 0.1 %	
	> 90 dB	
	> 90 dB	

	80 dB	IEC60914
	110 dB	IEC60914

	72 dB	0.5
	87 dB	
	0 dBV	
	3 dBV	
	> 32 ohm < 1k ohm	
	65 mW	

NFC	ISO/IEC14443 A 106 kbps 848 kbps MIFARE 106kbps
-----	---

x x	72 x 259 x 139 2.8 x 10.2 x 5.5 (RAL 9017)
	955 2.1

	5 °C +45 °C 41 °F +113 °F
	-30 °C +70 °C -22 °F +158 °F
	< 90 % > 5%

## DCNM-DVT

S	DCNM-DVT
---	----------

DCNM-HDMIC	S	S
S	DCNM-HDMIC	

DCNM-MICS	S	S
S	DCNM-MICS	

DCNM-MICL	S	S
S	DCNM-MICL	

DCNM-TC D	10	DCNM-xD	0
	0	S	0
0	DCNM-TC D		

ACD-MFC-ISO	MIFAREclassic	1kB	50pcs
2		0	/
ACD-MFC-ISO			

ACD-EV1-ISO	MIFARE EV1	8kB	50pcs
2			/
S	V		0
ACD-EV1-ISO			

DCNM-LSID

S

S

S

S AØAñŸD •ÑEd dc"é"