


DCNM-D

www.bo h t . o

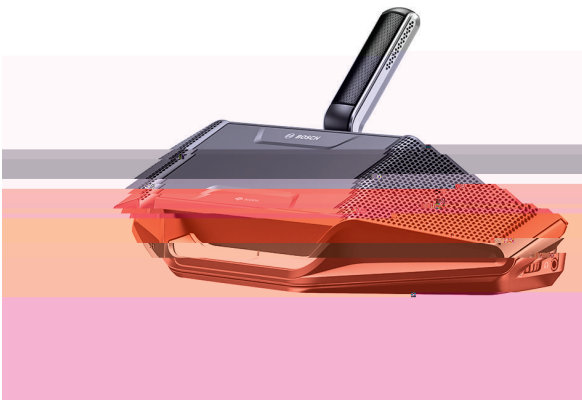

u
u
u

S

S

S

S

S

•

•

S

•

—

—

•

—

—

—

—

•

•

•

•

•

3.

0. 4

2

J4

-
-
-
-
-
-
-
-
-

-
-
-
-
-

	/
CE	DECL EC DCNM-D
1	DCNM D DICENTIS

	48 VDC
	3.1 W
	100 Hz – 20 kHz -3 dB
THD	< 0.1 %
	> 90 dB
	> 90 dB

	80 dB	IEC60914
	110 dB	IEC60914

	72 dB	0.5
	87 dB	
	0 dBV	
	3 dBV	
	> 32 ohm < 1k ohm	
	65 mW	

x x	72 x 259 x 139 2.8 x 10.2 x 5.5 (RAL 9017)
	955 2.1

	5 °C +45 °C 41 °F +113 °F
	-30 °C +70 °C -22 °F +158 °F
	< 90 % > 5%

DCNM-D			
		S	
DCNM-D			
DCNM-HDMIC			
	S		S
DCNM-HDMIC			
DCNM-MICS			
	S		S
DCNM-MICS			
DCNM-MICL			
	S		S
DCNM-MICL			
DCNM-TCD	10	DCNM-xD	
	0	S	0
DCNM-TCD			
DCNM-LSDU			
	2		S
	S		S
	S	S	
DCNM-LSDU			

:
333 203 9
20033
+ 6 2 22
+ 6 2 22 2099
htt :// .bo h t . o
400 3 0 669
t @ .bo h. o
20 |
20 9 9 23 |zh S V 9. 20