



Control® 67HC/T

Narrow-Coverage,
High Ceiling Pendant
Loudspeaker with RBI


Professional Series

Key Features:

- ▶ JBL® (BD) 75 d
- ▶ C 25 (1) -d
- ▶ E f d u d u d
- ▶ H 4.5 (15) du
- ▶ (- H).
- ▶ L d C d
- ▶ 8 d 70 /100

Applications:

C 67HC/ u u, u -
d u u d du d
u d d d.
d u d u d f u
u u u d u
JBL® (BD) B u d
I u d (BD) E EC
u d , d
(11.6) d C 295
u u d d u d
u u d u d
C 67HC/ ud
u d u u
ud d, d
d 4.5 (15) I ud
ud d f du L
u
165 (6½) - u d
25 (1) d d
d d d (1) -
d u u d d u
d u u d u d
f d u d u
C 67HC/ u
60 u - u
70 /100 d u d ud , d
8- d - d
Eu -
u F d ud
u ud u

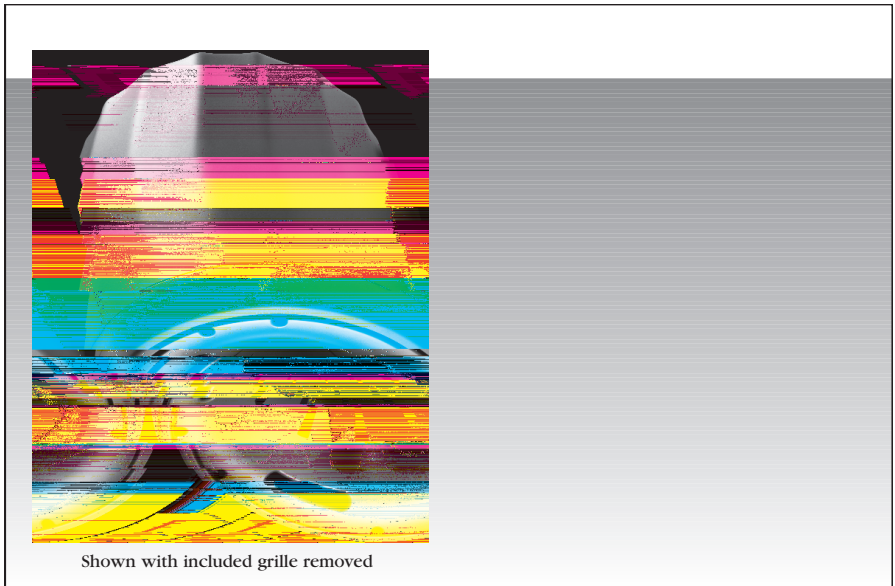

Specifications:

| System: | |
|----------------|--|
| F u (-10 dB): | 75 H 17 H |
| F u (3 dB): | 110 H 16 H |
| P C : | 75 C u u P N P (300) |
| | 150 C u u P P |
| N : | 93 dB |
| N C A : | 75 (+15 /-20) |
| D (): | 10.4 |
| D I d (DD): | 9.8 dB |
| d M u PL @ 1 : | 112 dB u u , 118 dB |
| d I d : | 8 |
| | 70 : 60 , 30 , 15 & 7.5 100 : 60 , 30 , 15 |
| I L : | 0.5 dB @ 7.5 , 0.5 dB @ 15 , 0.6 dB @ 30 , 0.7 dB @ 60 |
| Transducer: | |
| LF D : | 165 (6.5) - d f u u u u u d, 25 (1) , d |
| HF D : | 25 (1.0) - d u - u d , u u |
| Enclosure: | |
| E u M : | H |
| G : | () d - f |
| E : | E d M 810 u d , u & IP44 IEC 529 |
| | u 2- d - u, M 12 A G (2.5 2). u d u d ud d. |
| u : | d d u (u 4.5 (15)) 2 (0.077) , d- u d G d du L 45 (99). du C L |
| A : | d L1480, L1876. I IEC60849/EN60849. u d G d L1598 d L2239, d C A C 3426-01 & C 3426-81. |
| D : | 333 (13.1) d 344 (13.6) 369 (14.5) u |
| N (): | 5.9 (13) |
| (): | 14.1 (31) |
| I ud d A : | u (u , u) , 2- u - u |
| O A : | M C-PC60HC / |
| C : | A (- H). P |

¹ Fu - (u d d)
² C u u P N IEC- d 6 dB - 100. u
d u C u u P
³ Fu - (u d) , 1.5 H 10 H C u u P N
JBL u d du C du d du u

► Control 67HC/T Narrow-Coverage, High Ceiling Pendant Loudspeaker with RBI

