

HU

®

SHURE  
UA846Z2

GLX-D Frequency Manager

POWER

SHURE  
GLXD4R

rf: auto  
gl: 15.52  
ch: 20  
channel

SHURE  
GLXD4R

rf: auto  
gl: 12.39  
ch: 20  
channel

SHURE  
GLXD4R

rf: auto  
gl: 15.55  
ch: 20  
channel

SHURE  
GLXD4R

rf: auto  
gl: 09.20  
ch: 20  
channel

SHURE  
GLXD4R

rf: auto  
gl: 15.51  
ch: 20  
channel

SHURE  
GLXD4R

rf: auto  
gl: 11.43  
ch: 20  
channel

GLX-D® ADVANCED



# GLX-D® Advanced

## GLX-D® ADVANCED



### UA846Z2 GLX-D

- - 
  - 
  -
- /
  - GLXD4R
  - 2.4 GHz

### GLXD4R

- 
- 
- 
- LCD
- XLR ¼
- 
- 

LED



### GLXD1 GLXD2

- GLXD4R
- 
- GLXD1
- GLXD2
- 
- 30
- 20
- 16
- 

SM58®

60  
50



# GLX-D® Advanced

# GLX-D

## 1. GLX-D

- 
- 
- 2.4 GHz
- 

GLXD4R



## 2. GLX-D

- 
- ( 11 )
- Advanced

9

GLX-D



**PA805Z2-RSMA**

- 8dB
- 2.4GHz
- 24dB



**UA505**

PA805Z2-RSMA UA8-Z2



**RSMA**

50 6 25 50 100

3.

GLX-D

4.

---


GLX-D

USB



16



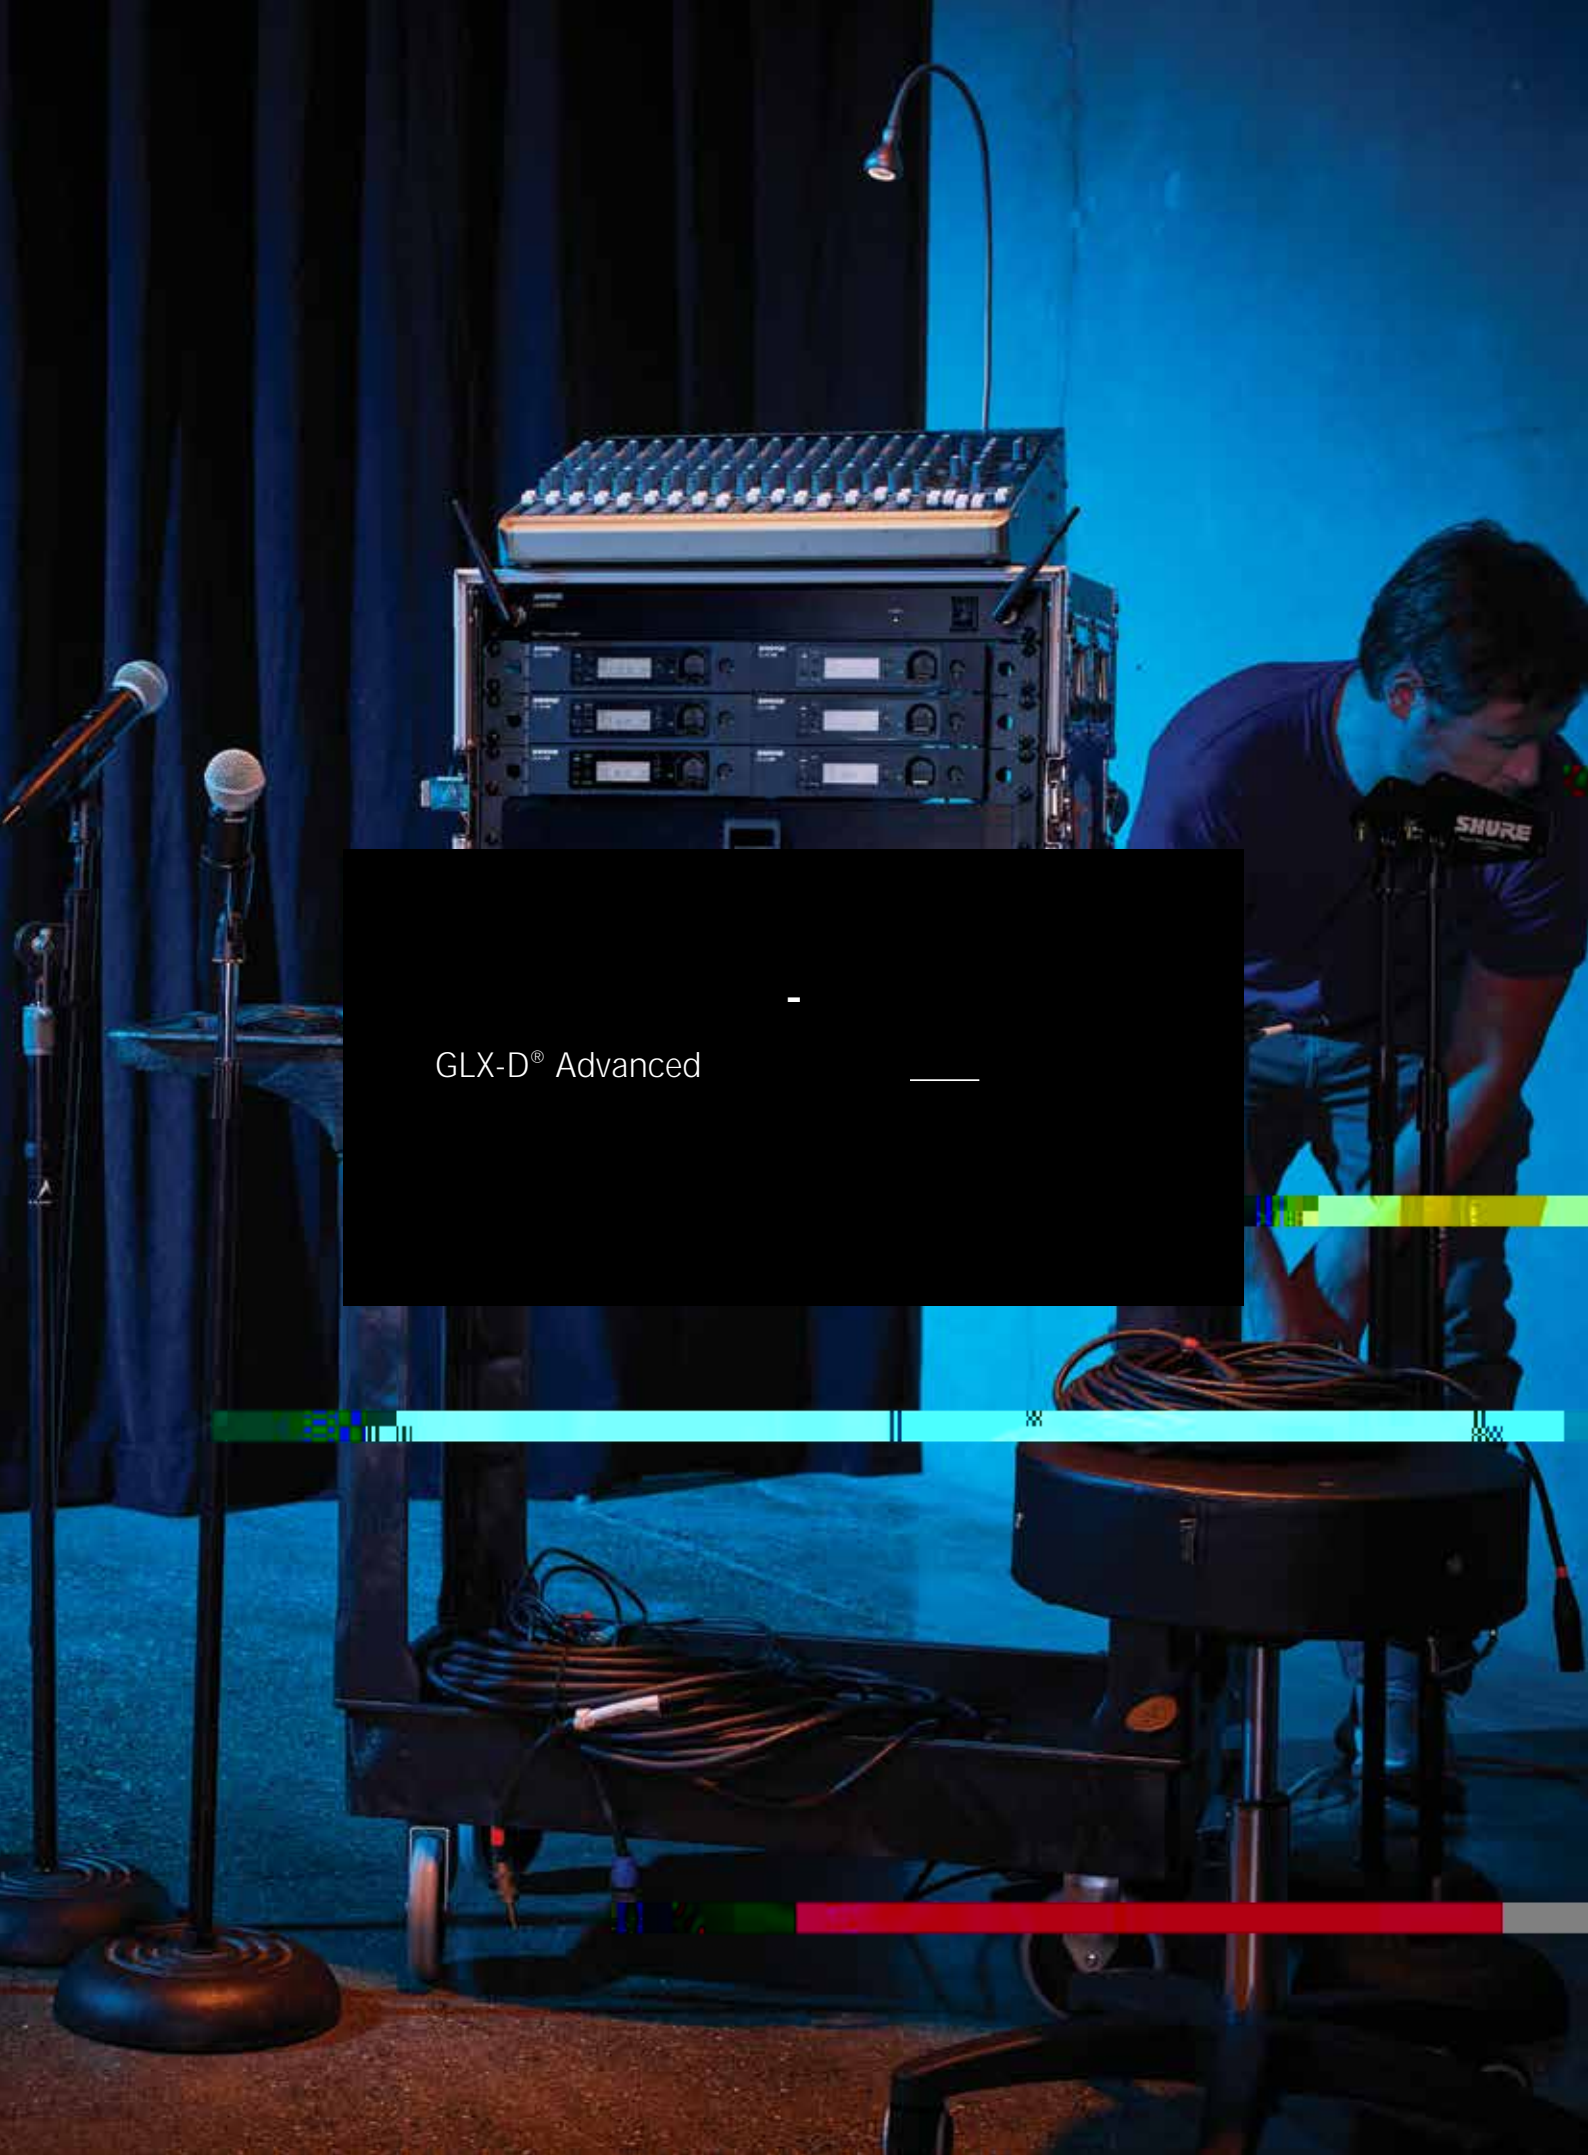

GLX-D® Advanced

	UA846Z2	GLXD4R	PA805Z2-RSMA
9 11	15 VDC	42 197 163 ( )	<2.1 (VSWR) 2050 2700 MHz
30 (100 ) 60 (200 ) 20 (65 ) 50 (165 )	15 VDC ( 6)	907.2	(2.45 GHz ) 8 dBi
GLX-D	-18 °C 63 °C(0 °F 145 °F)	14 18 VDC( )550 mA	<b>3 dB</b> 100
20 Hz – 20 kHz	45 483 192 ( )	>35 dB( )	(2.45 GHz ) 89%
120 dB A	1.63	-18 42 dB(1 dB )	50
1 /A 4.0 2 3 4 /B 7.3	SMA	/ 30 dB	(2.45 GHz ) 24 dB
-88 dBm( )	2400 2483.5 MHz	50	SMA
0.2%( )	35 dB( )	½	105 164 27.5 ( )
10 mW E.I.R.P.( )	50	-20 dBm	70
-18 °C (0 °F) 57 °C (135 °F)	-10 dBm		
-29 °C (-20 °F) 74 °C (165 °F)	+15 dBm		
( ) 3)	WA302 SMA 2( ) 1/4 2400 2483.5 MHz (OIP3) 48 dBm( )		
16	50		
/	35 dB( )		
	-3 0 dB		

		<b>6.35</b> (1/4 )
	100	100 (50 )
	+18 dBV -12 dBV	+12 dBV
	1= 2= 3=	= = =

**GLXD1**

90.4 64.5 22.9  
( )

3.7 V (1 kHz 1% )+  
8.4 dBV (7.5 Vp-p)

900 k TA4M  
1 ( )  
2 +5 V  
3  
4  
4 (TA4M) ( 4 )

**GLXD2**

(SM58)  
252 51  
( )

(SM58 )  
267

3.7 V

10 mW E.I.R.P.( )  
145 dB SPL



625 22  
info@shure.com.hk

618  
(II) 18 A  
info@shure.com.cn

1  
816