unipoint®

CARDIOID CONDENSER BOUNDARY MICROPHONE

SPECIFICATIONS

Off, on-fat, on-roll-off

- Low-profle design with low-refectance fnish for minimum visibility.

flter provides a steep low-frequency attenuation to improve

flter provides easy switching from a fat frequency response to a low-end roll-off. The roll-off position reduces the pickup of low-frequency ambient noise (such as traffc, air-handling systems,

Polar Pattern



Frequency Response

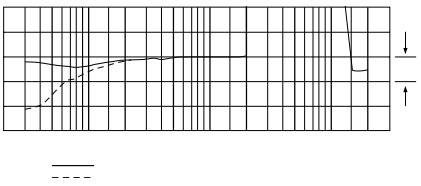

audio-technica®


60°