

Preliminary

Confidea DD/CD G3

Generation III

WIRELESS DISCUSSION UNIT

Art. 71.98.0005 / 71.98.0015



Confidea DD G3



Confidea CD G3

Confidea®

Confidea

Confidea DD G3

a
Ä

T

éQA 7r4\$ Ž• Ck 'ŋY•#Ék•ÀlSož

状态指示

红色电池状态LED指示灯

4h : 1 Hz

2h : 2 Hz

1h : 4 Hz

LED

:

:

:

2

2 LED

(CD)

D- MIC30SL 71.98.0053

D - MIC40SL 71.98.0054

D- MIC50SL 71.98.0055

Confidea BP 71.98.0042


Confidea CHT 71.98.0043

Confidea CHC 71.98.0044

TEL151 71.04.0151



	16 bit digital @ 32 kHz
	max 3.5W
RF	< 20 dBm
	23 ms
(D-MIC 30,40, 50SL)	
	20 ms
	unidirectional
	-43.4 dBV/Pa
	130 Hz - 15kHz
	680 Ω
150 - 20 000 Hz	
	80 mW/ 32Ω
	77.5 dBr (A)
	100 - 14 000 Hz
	> 16 Ω
THD+N	0.06 % @ 1kHz in 32Ω load
+5 ... 50 °C	
230(w), 130(h), 60(d)	
(g)	480
	RAL9011
Confidea DD G3 71.98.0005 Confide CD G3 71.98.0015	

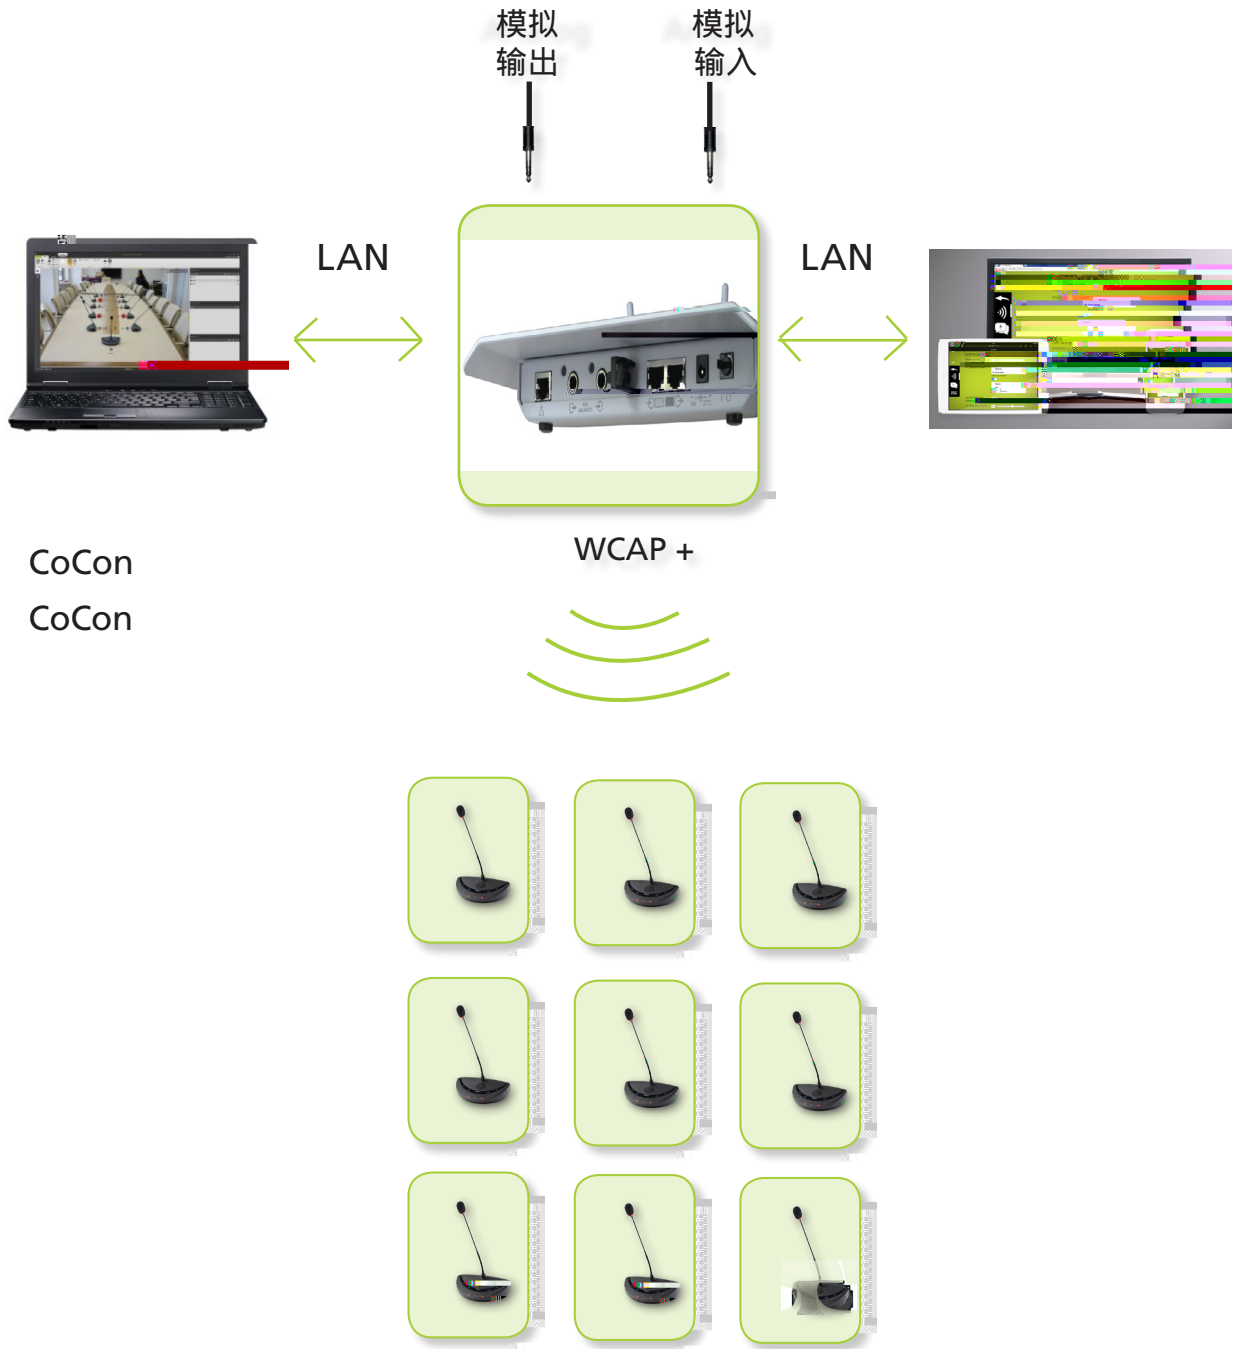

CoCon
CoCon

WCAP +